




TELHA Ondulada GA 17/1000

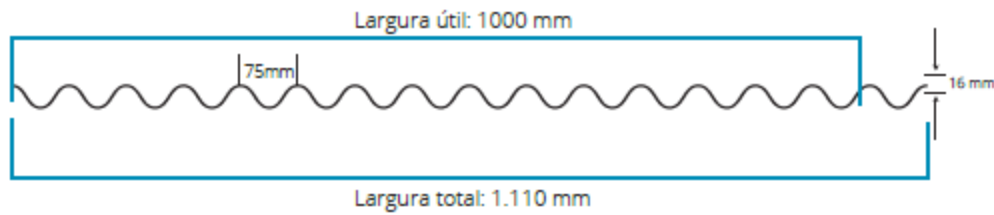


SOBRECARGAS (Kg/m²)

Esp. (mm)	Nº de Apoios	Distância Entre Apoios (mm)					
		1000		1250		1500	
		F	C	F	C	F	C
0,43	▲▲	220	137	-	-	-	-
	▲▲▲	225	225	144	144	-	-
	▲▲▲▲	281	259	180	133	-	-
0,50	▲▲	256	160	-	-	-	-
	▲▲▲	261	261	167	167	116	112
	▲▲▲▲	326	301	209	154	143	140
0,65	▲▲	333	208	170	106	-	-
	▲▲▲	336	336	215	215	149	146
	▲▲▲▲	420	392	269	200	185	150

F = Fechamento | C = Cobertura

TELHA TRAPEZOIDAL TP 25

Trapézio GA 25/1010

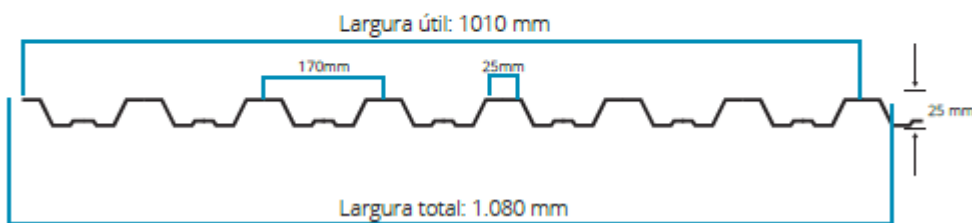

SOBRECARGAS (Kg/m²)


Esp. (mm)	Nº de Apoios	Distância Entre Apoios (mm)									
		1000		1250		1500		1750		2000	
		F	C	F	C	F	C	F	C	F	C
0,43	▲▲	267	267	171	171	119	114				
	▲▲▲	267	267	171	171	119	119				
	▲▲▲▲	334	334	214	214	148	148	109	109		
0,50	▲▲	309	309	198	198	137	132	101			
	▲▲▲	309	309	198	198	137	137	101	101		
	▲▲▲▲	386	386	247	247	172	172	126	126		
0,65	▲▲	403	403	258	258	179	172	132	108		
	▲▲▲	403	403	258	258	179	179	130	132	101	101
	▲▲▲▲	504	504	323	323	224	224	165	165	126	126

F = Fechamento | C = Cobertura



TELHA TRAPEZOIDAL TP 40

Trapézio GA 40/980

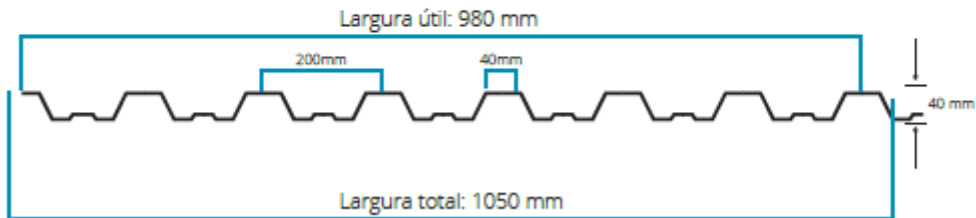

SOBRECARGAS (Kg/m²)

Esp. (mm)	Nº de Apoios	Distância Entre Apoios (mm)								
		2000		2250		2500		2750		
		F	C	F	C	F	C	F	C	
0,43	▲▲	128	128	101						
	▲▲▲	128	128	101						
	▲▲▲▲	161	161	127	127	103	103			
0,50	▲▲	149	149	118						
	▲▲▲	149	149	118						
	▲▲▲▲	186	186	147	147	119	119			
0,65	▲▲	191	191	151	138	122	100			
	▲▲▲	191	191	151	151	122	122	101	101	
	▲▲▲▲	239	239	189	189	153	153	126	126	

F = Fechamento | C = Cobertura